

## Indoor Dome Camera



Sony® chipset gives the most vibrant colour and the clearest image. It is most suitable for the happy environment of your nursery. And this lightweight, discreet dome camera gives an elegant, non-intrusive presentation.



### Key Features:

- 1/3" Sony® Super HAD Color CCD II
- Day & Night (0.01Lux)
- Digital Wide Dynamic Range (D-WDR)
- 600 TV Lines High Resolution
- Digital Noise Reduction (2D DNR)

### Specifications:

<b>Image Sensor</b>	1/3" Sony® Super HAD CCD II
<b>Horizontal Resolution</b>	More than 600 TV Lines
<b>Lens</b>	3.6mm (Optional 2.9mm / 6.0mm)
<b>Min Illumination</b>	0.1 Lux@ F1.2 (Normal Color Mode, 50 IRE)
<b>Effective Pixels</b>	768(H) x 494(V) – NTSC; 752(H) x 582(V) – PAL
<b>Video Output</b>	CVBS : 1.0Vp-p / 75 Ohm
<b>Scanning System</b>	2:1 Interlace
<b>Sync. System</b>	Internal
<b>Electronic Shutter Speed</b>	1/60~1/100,000 Sec – NTSC; 1/50~1/100,000 Sec – PAL Auto / Manual / Flickerless
<b>S/N Ratio</b>	52dB (AGC Off, Weight On)
<b>Operating Temp.</b>	-14~122°F / -10~+50°C
<b>Operating Humidity</b>	30% ~ 80% RH
<b>Power Supply</b>	DC 12V / 150mA
<b>Dimension (Φ x H)</b>	112mm x 87mm


\* Specifications are subject to change without notice

NurseryCam 

## Outdoor VR Dome Camera



The vandal-resistant housing offers better protection to the camera, while its elegant dome design makes it ideal for a less intrusive presentation, especially for listed buildings.

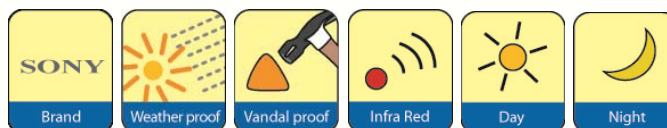

### Key Features:

- 1/3" Sony® Super HAD CCD II
- 600 TV Lines High Resolution
- Smart IR function – Auto IR intensity adjustment of objects at short distances
- Digital Noise Reduction (2D DNR)
- 24 IR LED for Low light Environment

### Specifications:

<b>Image Sensor</b>	1/3" Sony® Super HAD CCD II
<b>Horizontal Resolution</b>	More than 600 TV Lines
<b>Lens</b>	3.6mm (Optional 2.9mm / 6.0mm)
<b>Min Illumination</b>	0.01 ux@ F1.2 (Normal Color Mode, 50 IRE0 0.000 Lux (CDS On)
<b>Effective Pixels</b>	768(H) x 494(V) – NTSC; 752(H) x 582(V) – PAL
<b>Video Output</b>	CVBS : 1.0Vp-p / 75 Ohm
<b>Scanning System</b>	2:1 Interlace
<b>Sync. System</b>	Internal
<b>Electronic Shutter Speed</b>	1/60–1/100,000 Sec – NTSC; 1/50–1/100,000 Sec – PAL Auto / Manual / Flickerless
<b>S/N Ratio</b>	52dB (AGC Off, Weight On)
<b>Operating Temp.</b>	14°F–122°F / -10~+50°C
<b>Operating Humidity</b>	30% ~ 85% RH
<b>Power Supply</b>	DC 12V / 300mA
<b>Dimension (Φ x H)</b>	97mm x 80mm

\* Specifications are subject to change without notice